

TTL-232-5P
RS-232 To 5V TTL Converter - DB9

SERIALCOMM.COM

Datasheet Revision 2.5

GENERAL FEATURES:

- Plug-and-Play (hot-pluggable)
- Port powered - no external power needed
- Data direction auto-turnaround - no flow control necessary
- Built-in surge and static protection
- 5-year replacement manufacturer's warranty
- CE, FCC, RoHS and REACH certified



DESCRIPTION:

The SerialComm TTL-232-5P is a bi-directional port powered RS-232 to 5V TTL converter which converts a full-duplex RS-232C port to a 5V TTL signal. A built-in data direction auto-turnaround feature automatically enables the TTL driver when data is present from the RS-232 port, eliminating the need for software drivers, and making the device fully plug-and-play. The TTL-232-5P has a DB9 female connector on the RS-232 serial port, and DB9 male connector on the TTL port. A separate terminal block is included with the product. The terminal block plugs into the TTL port, providing screw-lug wire terminations for the port. The unit is enclosed in a rugged ABS housing and is powered from the RS-232 data lines; no external power is required.

CERTIFICATIONS:




TTL VOLTAGE LEVELS:

TTL INPUT	TTL OUTPUT
HIGH (> 2.0V)	HIGH (5.0V)
LOW (< 0.8V)	LOW (0.0V)

PINOUT CONFIGURATION:
RS-232 SIDE – DB9 FEMALE


SIGNAL	DCD	DTR	DSR	RTS	CTS	T X	R X	GND
PIN #	1	4	6	7	8	2	3	5
FUNCT.	TIED			TIED		T X	R X	GND

FEM. DB9




TTL SIDE – DB9 MALE OR TERMINAL BLOCK

SIGNAL	NC	TTL IN	TTL OUT	NC	GND
PIN #	1	2	3	4	5
FUNCTION	NC	TTL IN	TTL OUT	NC	GND



MALE DB9



SPECIFICATIONS:

COMMUNICATION	
STANDARDS:	EIA/TIA RS-232C Standard
BAUD RATES:	From 300 bps to 115,200 bps
CONNECTOR TYPES:	RS-232 Side: DB9 Female and TTL Side: either DB9 Male or 5 Way Terminal Block
DISTANCE:	RS-232 Side: 16 ft (5m) and TTL Side: up to 10 ft (3m)
ELECTRICAL	
POWER SOURCE:	Port Powered From RS-232 Data Lines
CURRENT CONSUMPTION:	Less Than 10 mA
STATIC PROTECTION:	15KV Electric Static Discharge (ESD) Protection
SURGE PROTECTION:	600W Surge Protection
MECHANICAL	
HOUSING:	Rugged ABS
WEIGHT:	With Terminal Block: 1.2oz (36 grams) Without Terminal Block: 0.8oz (24 grams)
DIMENSIONS:	With Terminal Block: 3.16" X 1.32" X 0.73" (80.3 mm X 33.4 mm X 18.6 mm) Without Terminal Block: 2.47" X 1.33" X 0.70" (62.8 mm X 33.8 mm X 17.8 mm)
ENVIRONMENTAL	
OPERATING TEMP:	-4° F to 140° F (-20°C to 60° C)
STORAGE TEMP:	-40° F to 185° F (-40°C to 85° C)
OPERATING HUMIDITY:	5% To 95% - No Condensation
QUALITY	
PRODUCT SAFETY:	CE, FCC, RoHS and Third-party Third-party Certified
QUALITY MANAGEMENT:	Manufactured and Distributed to ISO 9001:2015 QMS
RELIABILITY:	Low Failure Rate – 99+% Reliability Since Inception
WARRANTY:	5 Year Replacement Warranty

TROUBLESHOOTING INSTRUCTIONS:

Using one TTL-232-5P unit:

1. Check that all connections comply with the connection diagrams.
2. Perform a loop back test on one unit:
 - a) Connect the TTL IN to TTL OUT on the TTL port.
 - b) Connect the RS-232C port to the PC RS-232 port.
 - c) Running a hyper terminal program on the PC, send ASCII characters to the TTL-232-5P converter from one PC port, and check that the characters are received at the same PC port. This tests that the transmit and receive functions of the TTL-232-5P unit is working properly.

Using two TTL-232-5P units:

1. Check that all connections comply with the connection diagrams.
2. Perform a loop back test on two units:
 - a) Connect the two TTL ports. Connect TTL IN to TTL OUT and TTL OUT to TTL IN.
 - b) Connect the two RS-232 ports to two PC RS-232 ports.
 - c) Running hyper terminal programs on both PCs, send ASCII characters to the TTL-232-5P converter from one PC port, and check that the characters are received at the 2nd PC port. Repeat the test in the opposite direction. This tests that the transmit and receive functions of both TTL-232-5P units are working properly.

APPLICATIONS:



(HOST/ PC/ DTE)

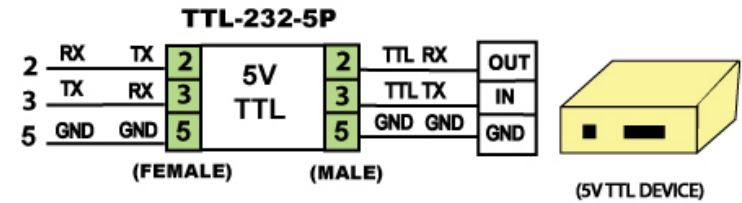


FIGURE 1: CONNECTING THE RS-232 PORT TO A 5V TTL DEVICE